



10.525GHz Microwave Motion Sensor Module



Block diagram and connection

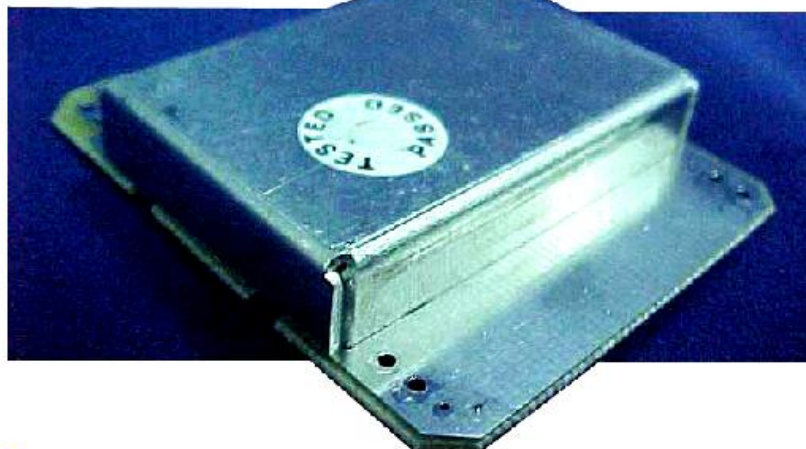

Description

HB100 Miniature Microwave Motion Sensor is a X-Band Bi-Static Doppler transceiver module. Its built-in Dielectric Resonator Oscillator (DRO) and a pair of Microstrip patch antenna array, make it ideal for OEM usage in motion detection equipment.

This module is ideally suitable for false alarms reduction in intruder detectors when work together with Passive Infrared (PIR) sensor. It can also be used for auto-door opening and vehicle speed measurement.


Features

- Low current consumption
- CW or Pulse operation
- Flat profile
- Long detection range


Applications

- Microwave-PIR motion detector
- Automatic door opener
- Speed measurement
- Lighting control

Antenna Beam Pattern

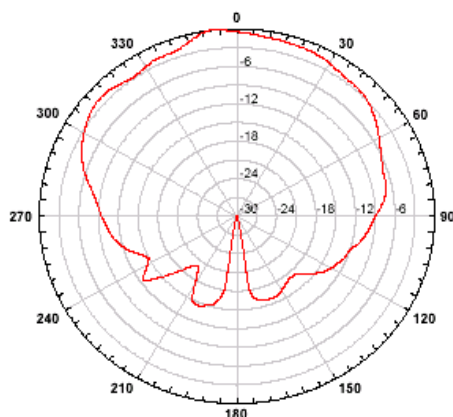

Azimuth

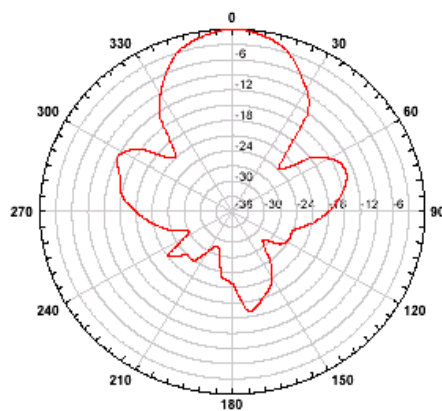

Elevation



CERT. NO. : 94-1-0033
SI ISO 9001 : 1994


CONTIN TECHNOLOGY

(HONGKONG)CO.,LTD


Technical Specifications

Outline diagram

(All dimensions in mm)

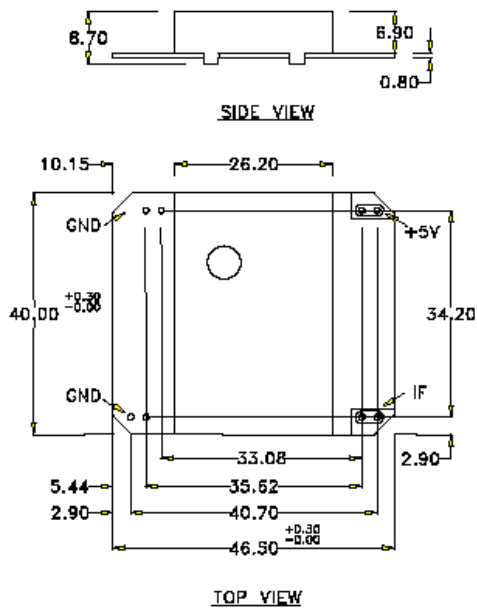

CONNECTION HOLE CHART		
DIAMETER	QTY	PLATED THRU
1.0	8	YES

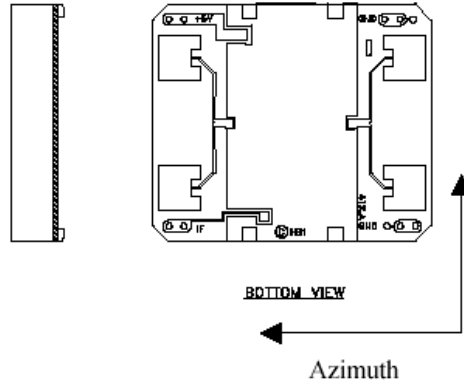

Unless noted otherwise, the specifications are measured with +5VDC, CW operation, 12 k Ω load and at an ambient temperature of +25°C.

Parameter	Notes	Min	Typ.	Max	Units
Radiated Power (EIRP)	1	12	15	20	dBm
Spurious Emission @ 3 m	1			25	μ V/m
Settling Time			3	6	μ Sec
Received Signal Strength	2	100		250	μ Vp-p
Noise	3			5	μ Vrms
Antenna Beam-width (3 dB) - Azimuth			80		°
Antenna Beam-width (3 dB) - Elevation			40		°
Supply Voltage		4.75	5.00	5.25	VDC
Current Consumption			30	40	mA
Pulse Repetition Frequency	4		2	3	KHz
Pulse Width	4	10			μ Sec
Operating Temperature		-15		55	°C
Weight			8		gm

Note 1: The radiated emissions of HB100 is designed to meet the requirements of Federal Communications Commission (FCC) rules, Part 15, Section 15.245 (use within a building or to open building door)

Note 2: The Received Signal Strength (RSS) is measured at the total 2 ways path loss of 93dB.

Note 3: The noise voltages are measured from 10 Hz to 100 Hz at the output port, inside an Anechoic chamber.

Note 4: Pulse operation.

Note 5: The design, manufacturing process and specifications of this device are subject to change without prior notice.

Note 6: CAUTION: ELECTROSTATIC SENSITIVE DEVICE. Observe precautions for handling and storage

All specifications subject to changes (REVJun03)

翰群科技(香港)有限公司

CONTIN TECHNOLOGY (HONGKONG) CO.,LTD
FT 1405 WING LEE IND BLDG 54-58 TONG MEI RD MONGKOK KLN, HONG KONG

TEL: (852) 23982562 FAX: (852) 23981536 E-mail: cwau5865@netvigator.com

SHENZHEN: 深圳市福田区八卦四路中榭六号楼 421 室 P.C.:518029

TEL: 0755-25875075 82408374 FAX: 0755-25875075